

AR3 SHCVO C

ARTISAN Shower Range Artisan Recessed Thermostatic Dual Control Shower Valve Chrome



Features:

- 15mm inlet connections
- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 45mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 80°C

Product Certifications:



WRAS Cert. Number: 1910908
WRAS Expiry Date: 31/10/2024




For more products, visit our website:
<http://www.bristan.com>



Specification

| | |
|-------------------------------------|--|
| Product Type: | Mixer Shower |
| Main Construction Material: | Brass |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | 15mm Compression |
| Number of Controls: | 2 |
| Flow Control Valve Type: | ¾" Ceramic Disc Valve & Thermostatic Valve |
| Plumbing System: | Suitable for all plumbing systems |
| Minimum Dynamic Pressure: (Bar) | 0.2 Bar |
| Maximum Dynamic Pressure: (Bar) | 5.0 Bar |
| Maximum Static Pressure: (Bar) | 10 |
| Maximum Hot Water Temperature: (°C) | 80°C |
| Pre-set Outlet Temperature: (°C) | 42°C |
| Isolation Included: | No |
| Check Valve Supplied: | Yes |
| Shower Kit: | Valve Only |

Dimensions (measurements in mm)

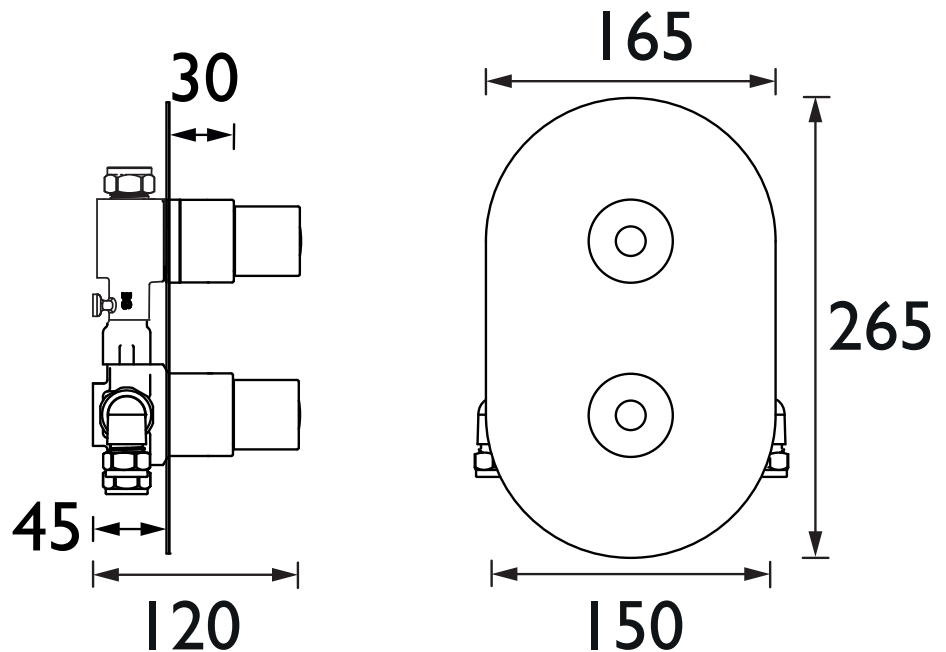

Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 |
|-----------------------|-----|------|----|------|------|------|
| AR3 SHCVO C | 7.5 | 14.1 | 21 | 30.5 | 37.3 | 48.2 |

TECHNICAL
DATA
SHEET



BRISTAN