

# OP SHXVO ISOL EH C

## OPAC Shower Range Opac SHXVO ISOL EH Valve Only Chrome



### Features:

- Cool Touch Shower valve body for ultimate user safety
- Easy installation with self-isolating wallmount 12 fixing kit
- Integral flushing mechanism for easy maintenance

### Product Certifications:



WRAS Expiry : 31/12/2023  
WRAS Cert Number : 1812905



TMV2 Expiry Date : 21/03/2024  
TMV2 Cert Number :  
NSF2091/0319



TMV3 Expiry Date : 15/02/2024  
TMV3 Cert Number :  
NSF2092/0219




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Style:	Contemporary
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic Cartridge & 3/4" Ceramic Disc Valve
Maximum Hot Water Supply Temp °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all systems, ideally balanced
Minimum Dynamic Pressure:	0.2 bar
Maximum Dynamic Pressure:	5.0 bar
Connection Inlet:	15mm compression
Connection Outlet:	1/2" BSP
Isolation Valve Included:	Yes
Check Valve Included:	Yes
Pre-set Outlet Temperature °C:	41

### Dimensions (measurements in mm)

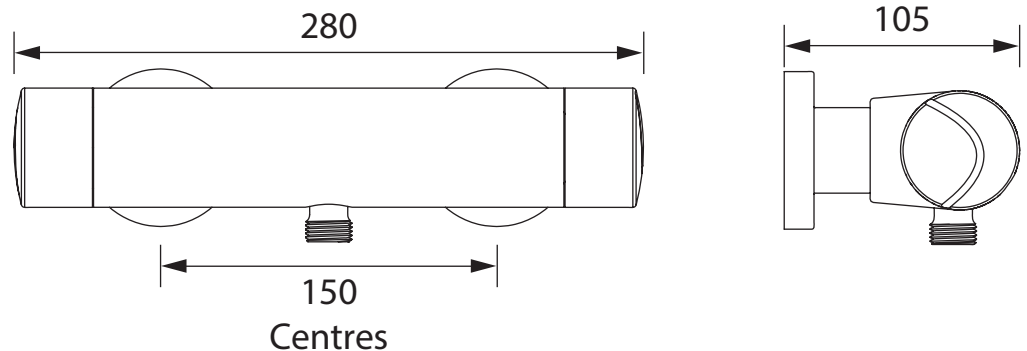

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Rate of flow (l/min)	5.9	9.4	9.5	11.3	11.8	11.4

## TECHNICAL DATA SHEET



# BRISTAN

D5