

PM2 CSHXAR C

PRISM Shower Range Prism Exposed Concentric Chrome Shower Valve with Adjustable Riser Kit



Features:

- 15mm inlet connections
- Easy replacement with adjustable inlets so you can use on existing pipework centres between 136mm and 158mm
- Thermostatic cartridge with preset temperature stop at 42°C
- Supplied with 2 x 8L/min flow regulators
- Includes riser rail with adjustable fixing bracket, multi-function rub-clean anti-limescale handset and hose

Product Certifications:



WRAS Cert. Number: 2205904
WRAS Expiry Date: 31/05/2027




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Exposed Valve
Shower Head Type:	Adjustable
Shower Kit:	Adjustable Riser
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5.0
Maximum Static Pressure (bar):	10
Connection Inlet:	1/2" BSP
Connection Outlet:	1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

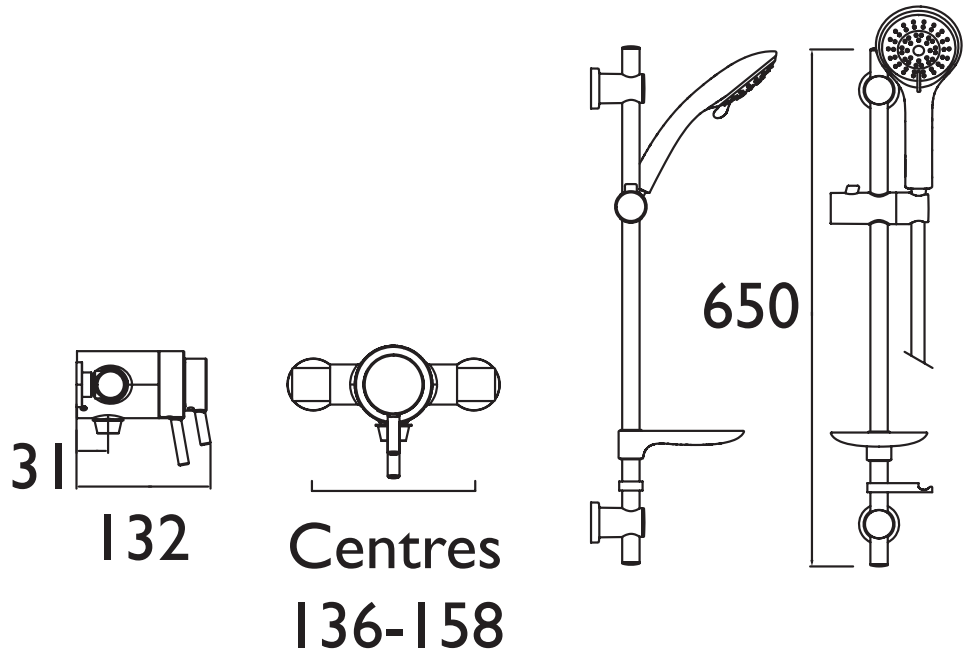

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Valve Only/Largest FR (mixed)	4.4	7	9.9	14	17.1	22.1
Through Handset (mixed)	4.4	7	9.9	14	17.1	22.1
With Flow Limiters (mixed)		6.3	9.1	12.9	15.7	20.3

TECHNICAL DATA SHEET



BRISTAN

D5