


# PM2 SHCDIV C

## PRISM Shower Range Prism Recessed Thermostatic Dual Control Shower Valve with Integral Two Outlet Diverter Chrome

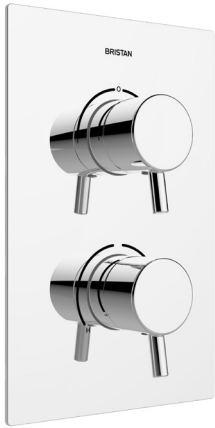

### Features:

- Slim design recessed shower valve will fit into a cavity space as small as 35mm for hassle-free installation.
- Includes integral two outlet diverter, which allows you to easily switch to an outlet of your choice such as a drench head or handset.
- Dual control - Flow and temperature are operated separately giving accurate control of both.
- Thermostatic cartridge with preset temperature safety stop at 42°C for family-safe showering. A higher temperature can be selected, if required, by selecting the override function.

### Product Certifications:



WRAS Cert. Number: 2005901  
WRAS Expiry Date: 31/05/2025




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No. of Controls:	2
Shower Type:	Dual Control
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic Cartridge & 3/4" Ceramic Disc Valves
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems
Working Pressure Range: (bar)	Min: 0.2 bar Max: 5.0 bar
Connection Inlet:	15mm Compression
Connection Outlet:	15mm Compression
Isolation Valve Included:	No
Check Valve Included:	Yes

### Dimensions (measurements in mm)

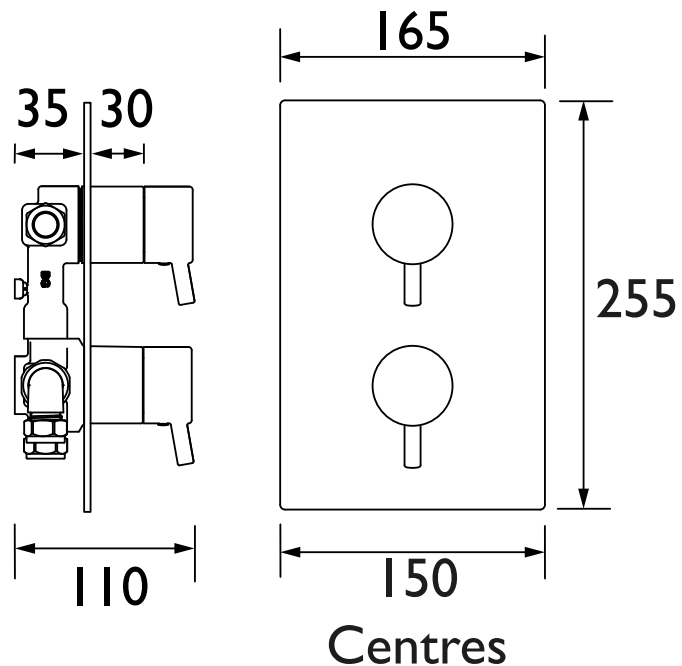

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	8.5	13.4	19	26.9	32.9	42.5
Outlet 2	8.6	14.7	20.8	29.4	36.1	46.5

# TECHNICAL DATA SHEET



# BRISTAN

D6